


Tapered Plugs with Pull Ring Tab

Easy removal due to ring tab

Protects threads, pipes, hoses and bores

No loss of construction space due to flat-type ring tab

EX STOCK
400m
Parts
DELIVERY SERVICE

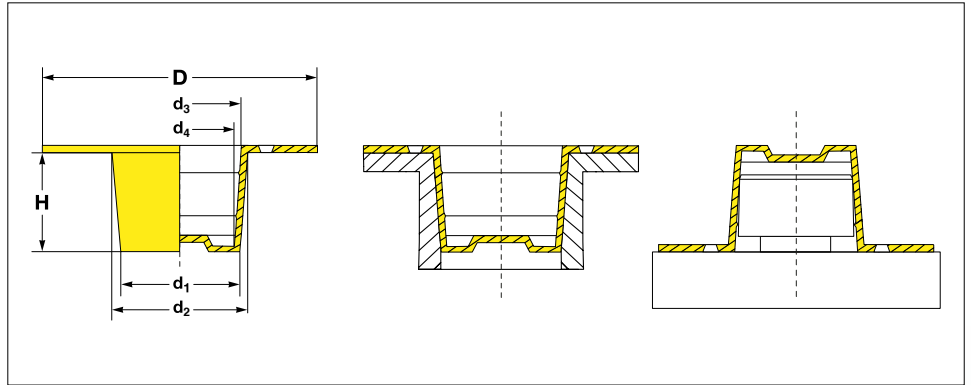

All dimensions in mm

Material :
LLD-PE,
linear low density polyethylene

Standard Colour :
yellow

Tapered body design of the plug accommodates larger tolerances.

Can also be used as a cap - EP 283 tapered Plugs with Pull Ring Tab has specific product characteristics Easy removal due to ring tab. Protects threads, pipes, hoses and bores. No loss of construction space due to flat-type ring tab. Whether for internal or external threads, pipes, compact plugs, bore-holes, fuel lines or hoses: You can be sure that EP 283 is the right tapered plug for your application.

Think Plastic. Go Protec.®

PROTEC
PLASTICS

Dimensions						Reference No.
d ₁	d ₂	d ₃	d ₄	D	H	
5.0	7.0	6.0	3.5	17.4	9.5	EP 283 RL 050
6.0	8.0	7.0	4.5	18.2	9.5	EP 283 RL 060
7.0	9.5	8.7	5.5	20.4	9.5	EP 283 RL 070
8.0	10.0	9.0	6.5	20.2	9.5	EP 283 RL 080
9.5	11.5	10.5	8.1	22.0	9.5	EP 283 RL 095
10.5	12.5	11.5	9.2	22.7	9.5	EP 283 RL 105
11.5	13.5	12.5	10.2	23.8	9.5	EP 283 RL 115
12.5	14.5	13.5	11.2	24.4	10.0	EP 283 RL 125
13.5	15.5	14.6	12.2	25.7	10.0	EP 283 RL 135
14.2	16.2	15.2	12.8	26.5	10.0	EP 283 RL 142
14.5	17.0	16.1	13.1	27.1	10.0	EP 283 RL 145
15.5	18.0	17.5	14.8	28.2	10.0	EP 283 RL 155
17.5	19.5	18.5	16.1	30.2	10.0	EP 283 RL 175
18.0	20.0	18.6	16.1	30.3	10.0	EP 283 RL 180
19.0	21.5	20.5	17.6	32.2	11.0	EP 283 RL 190
21.0	23.5	22.6	19.7	34.6	12.0	EP 283 RL 210
22.5	25.5	25.0	21.4	36.0	12.0	EP 283 RL 225
25.0	28.0	27.2	24.3	38.2	12.0	EP 283 RL 250
29.0	31.5	29.2	26.8	42.0	12.0	EP 283 RL 290
29.5	31.8	29.2	26.8	42.6	12.0	EP 283 RL 295

Should your requirements not be shown please ask for separate quotation.
PROTEC products and specifications are subject to improvement and change without notice.

Tapered Plugs with Pull Ring Tab

Easy removal due to ring tab

Protects threads, pipes, hoses and bores


No loss of construction space due to flat-type ring tab

TRIPLE ADVANTAGE of PROTEC CAPTOP®

QUALITY. Low-cost. Can be used as either a cap or plug. Easy fitting and removal. Provide excellent protection from damage, dirt, moisture and corrosion during storage and transportation.

AVAILABILITY. With over 400 million moulded components shipped from our Oststeinbek / Hamburg logistics center we provide the fastest on time delivery service to all markets and industries.

PHILOSOPHY. Innovative protective closures at the best price in the market.

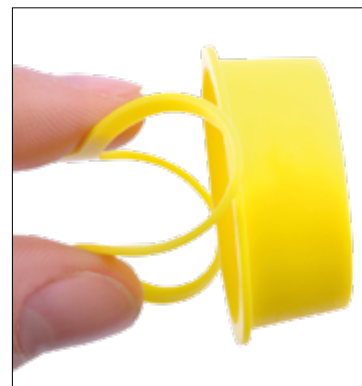

All dimensions in mm

Metric Internal Thread				BSP	DIN 40430	Reference No.
Standard thread	Fine thread					
M 6						EP 283 RL 050
M 8		M 8 × 1				EP 283 RL 060
M 10		M 10 × 1	M 10 × 1.5			EP 283 RL 070
M 11		M 10 × 1	M 10 × 1.5	G 1/8		EP 283 RL 080
M 12		M 12 × 1	M 12 × 1.5			EP 283 RL 095
M 14		M 12 × 1	M 12 × 1.5	G 1/4	PG 7	EP 283 RL 105
M 14			M 14 × 1.5			EP 283 RL 115
M 16		M 15 × 1	M 14 × 1.5		PG 9	EP 283 RL 125
M 16			M 16 × 1.5			EP 283 RL 135
M 18			M 16 × 1.5	G 3/8		EP 283 RL 142
M 18	M 18 × 2		M 18 × 1.5			EP 283 RL 145
M 20	M 18 × 2		M 18 × 1.5			EP 283 RL 155
M 20	M 20 × 2		M 20 × 1.5	G 1/2	PG 11	EP 283 RL 175
M 22	M 20 × 2		M 20 × 1.5	G 1/2		EP 283 RL 180
M 22	M 22 × 2		M 22 × 1.5		PG 13.5	EP 283 RL 190
M 24			M 24 × 1.5	G 5/8	PG 16	EP 283 RL 210
M 27	M 24 × 2		M 26 × 1.5	G 3/4		EP 283 RL 225
M 30	M 27 × 2		M 27 × 1.5			EP 283 RL 250
M 33	M 33 × 2		M 30 × 1.5	G 1		EP 283 RL 290
M 36	M 33 × 2		M 32 × 1.5 M 33 × 1.5	G 1		EP 283 RL 295

Should your requirements not be shown please ask for separate quotation.

PROTEC products and specifications are subject to improvement and change without notice.

Material :
LLD-PE,
linear low density polyethylene

Standard Colour :
yellow

Individual Productions :
On request we develop and produce individually tailored solutions next to the standard items of this range: additional dimensions, different materials and new colours

We would be pleased to advise you.

Think Plastic. Go Protec.®

PROTEC
PLASTICS