


PROTEC PROSICON® EPS 860

Heat-resistant Silicone Round Tubing- metric

PROTEC
PLASTICS

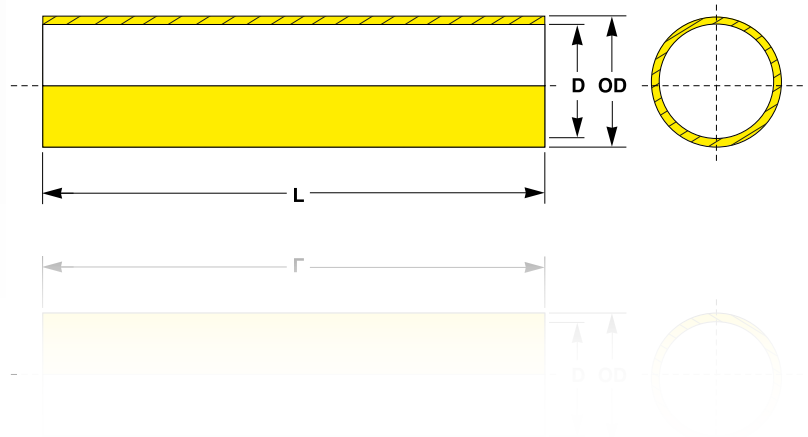

YOUR PROSICON® PRODUCT ADVANTAGE. BEST PRICE PERFORMANCE IN THE MARKET.

HEAT-RESISTANT SILICONE ROUND TUBING- METRIC

As an alternative to caps, the silicone hose is used to cover threaded bolts, screws or bolts in excess length. Especially in occasions when many different lengths have to be covered with the same diameter.

Available in large range of diameters.

Recommended for Powder coating, e-coating, plating & anodizing.

PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316 ° C / 4 hours. On request also in EPDM material up to max. 177 ° C available.

PROSICON® BLU SIGNATURE® PRODUCT CODE.

Premium. Reusable. Stabilized with Special Blends.

COLOR OPTIONS.

Special color runs available on request.

TECHNICAL CLEANLINESS FOR ACCURATE MASKING.

Prosicon® Silicone Maskign Caps and Plugs are stabilized and tempered separately. This process improves dimensional stability and prevents plasticizer exudation during customer applications under high temperature conditions.

PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone Maskign Caps and Plugs have an excellent resistance to high temperature, chemicals and acids and can be used several times without loss of quality.

SILICONE / EPDM CUSTOM DESIGN AT RECORD SPEED.

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours.

We would be pleased to assist you.

- Customized.** For your special application
- Time Saver.** Rapid Prototyping & Hi-Speed functional samples
- Hi-Speed.** Fast Lane Serial Mold Construction
- Unbeatable.** At the best price in the market

PROTEC PROSICON® EPS 860

Heat-resistant Silicone Round Tubing- metric



DIMENSIONS

All dimensions in mm

Dimensions			Reference No.
D	OD	L (Metre)	
2.00	5.00	25.00	EPS 860 / 02/05
2.80	4.80	25.00	EPS 860 / 2.80/4.80
2.80	5.80	25.00	EPS 860 / 2.80/5.80
3.00	5.00	25.00	EPS 860 / 03/05
3.00	6.00	25.00	EPS 860 / 03/06
3.50	5.50	25.00	EPS 860 / 3.50/5.50
3.80	5.80	25.00	EPS 860 / 3.80/5.80
4.00	5.00	25.00	EPS 860 / 04/05
4.00	7.00	25.00	EPS 860 / 04/07
4.80	7.20	25.00	EPS 860 / 4.80/7.20
5.00	8.00	25.00	EPS 860 / 05/08
5.50	7.50	25.00	EPS 860 / 5.50/7.50
5.80	8.20	25.00	EPS 860 / 5.80/8.20
6.00	9.00	25.00	EPS 860 / 06/09
7.00	10.00	25.00	EPS 860 / 07/10
7.50	10.50	25.00	EPS 860 / 7.50/10.50
7.80	10.60	25.00	EPS 860 / 7.80/10.60
8.00	11.00	25.00	EPS 860 / 08/11
8.75	11.75	25.00	EPS 860 / 8.75/11.75
9.00	12.00	25.00	EPS 860 / 09/12
9.00	13.00	25.00	EPS 860 / 09/13
9.80	12.60	25.00	EPS 860 / 9.8/12.6
10.00	13.00	25.00	EPS 860 / 10/13
10.00	14.00	25.00	EPS 860 / 10/14
11.00	14.00	25.00	EPS 860 / 11/14
11.80	14.80	25.00	EPS 860 / 11.8/14.8
12.00	15.00	25.00	EPS 860 / 12/15
12.00	16.00	25.00	EPS 860 / 12/16
12.00	16.50	25.00	EPS 860 / 12.0/16.5
13.00	16.00	25.00	EPS 860 / 13/16
14.00	18.00	25.00	EPS 860 / 14/18
14.00	20.00	25.00	EPS 860 / 14/20
15.00	19.00	25.00	EPS 860 / 15/19
15.00	21.00	25.00	EPS 860 / 15/21
16.00	20.00	25.00	EPS 860 / 16/20
16.00	22.00	25.00	EPS 860 / 16/22
17.00	20.00	25.00	EPS 860 / 17/20
17.00	21.00	25.00	EPS 860 / 17/21
18.00	22.00	25.00	EPS 860 / 18/22
18.00	25.00	25.00	EPS 860 / 18/25
20.00	24.00	25.00	EPS 860 / 20/24
20.00	25.00	25.00	EPS 860 / 20/25
22.00	26.00	25.00	EPS 860 / 22/26
25.00	29.00	25.00	EPS 860 / 25/29
25.00	30.00	25.00	EPS 860 / 25/30
28.60	31.60	25.00	EPS 860 / 28.6/31.6
30.00	34.00	25.00	EPS 860 / 30/34
41.30	44.30	25.00	EPS 860 / 41.3/44.3

Should your requirements not be shown please ask for a separate quotation.
 PROTEC products and specifications are subject to improvement and change without notice.