

# PROTEC PROSICON® EPS 865

## Heat-resistant Silicone Round Tubing – BIS



**YOUR PROSICON® PRODUCT ADVANTAGE. BEST PRICE PERFORMANCE IN THE MARKET.**

### HEAT-RESISTANT SILICONE ROUND TUBING – BIS:

As an alternative to caps, the silicone hose can be used to cover threaded bolts, screws or bolts.

Especially when many different lengths have to be covered with the same diameter. Available in large range of diameters.

Recommended for Powder coating, e-coating, plating & anodizing.

### PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316 ° C / 4 hours. On request also in EPDM material up to max. 177 ° C available.

### PROSICON® BLU SIGNATURE® PRODUCT CODE.

Premium. Reusable. Stabilized with Special Blends.

### COLOR OPTIONS.

Special color runs available on request.

### TECHNICAL CLEANLINESS FOR ACCURATE MASKING.

Prosicon® Silicone Maskign Caps and Plugs are stabilized and tempered separately. This process improves dimensional stability and prevents plasticizer exudation during customer applications under high temperature conditions.

**HEAT RESISTANT!**

### PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone Maskign Caps and Plugs have an excellent resistance to high temperature, chemicals and acids and can be used several times without loss of quality.


### SILICONE / EPDM CUSTOM DESIGN AT RECORD SPEED.

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours. We would be pleased to assist you.

- |                    |   |
|--------------------|---|
| <b>Customized.</b> | For your special application                    |
| <b>Time Saver.</b> | Rapid Prototyping & Hi-Speed functional samples |
| <b>Hi-Speed.</b>   | Fast Lane Serial Mold Construction              |
| <b>Unbeatable.</b> | At the best price in the market                 |

# PROTEC PROSICON® EPS 865

## Heat-resistant Silicone Round Tubing – BIS

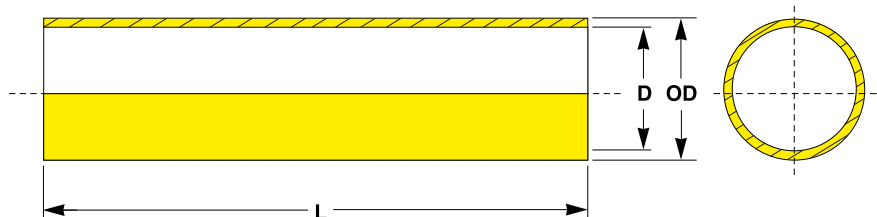

### DIMENSIONS BIS British Imperial System

All dimensions in mm

Dimensions			Reference No.
D	OD	L (Metre)	
1.02	4.19	30.48	EPS 865 / 0040
1.42	4.60	30.48	EPS 865 / 0056
1.57	4.75	30.48	EPS 865 / 0062
1.73	4.90	30.48	EPS 865 / 0068
2.03	5.21	30.48	EPS 865 / 0080
2.36	5.54	30.48	EPS 865 / 0093
2.77	5.94	30.48	EPS 865 / 0109
3.18	6.35	30.48	EPS 865 / 0125
3.56	6.73	30.48	EPS 865 / 0140
3.96	7.14	30.48	EPS 865 / 0156
4.37	7.54	30.48	EPS 865 / 0172
4.75	7.92	30.48	EPS 865 / 0187
5.16	8.33	30.48	EPS 865 / 0203
5.54	8.71	30.48	EPS 865 / 0218
5.94	9.12	30.48	EPS 865 / 0234
6.35	9.53	30.48	EPS 865 / 0250
7.14	10.31	15.24	EPS 865 / 0281
7.92	11.10	15.24	EPS 865 / 0312
8.71	11.89	15.24	EPS 865 / 0343
9.53	12.70	15.24	EPS 865 / 0375
10.31	13.49	15.24	EPS 865 / 0406
11.10	14.27	15.24	EPS 865 / 0437
12.70	15.88	15.24	EPS 865 / 0500
15.88	19.05	15.24	EPS 865 / 0625
19.05	22.23	15.24	EPS 865 / 0750
22.23	25.40	15.24	EPS 865 / 0875
23.80	26.97	15.24	EPS 865 / 0937
25.40	28.58	15.24	EPS 865 / 1000
28.58	31.75	7.62	EPS 865 / 1125
31.75	34.93	7.62	EPS 865 / 1250
34.93	38.10	7.62	EPS 865 / 1375
38.10	41.28	7.62	EPS 865 / 1500
41.28	44.45	7.62	EPS 865 / 1625
44.45	47.63	7.62	EPS 865 / 1750
47.63	50.80	7.62	EPS 865 / 1875
50.80	53.98	7.62	EPS 865 / 2000

Should your requirements not be shown please ask for a separate quotation.  
 PROTEC products and specifications are subject to improvement and change without notice.