

PROTEC PROSICON® EPS 250

High Temp Silicone Washer Pull Plugs – Long



HEAT RESISTANT!

YOUR PROSICON® PRODUCT ADVANTAGE. BEST PRICE PERFORMANCE IN THE MARKET.

HIGH TEMP SILICONE WASHER PULL PLUGS – LONG.

The disc plugs are ideal for covering the ring surface around the bore and for covering threads with edge cover. Cylindrical shaft design. Central pull tab. Push-fit application achieves a high sealing effect. Recommended for Powder coating, e-coating, plating & anodizing.

PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone rubber 55 shore A withstands temperatures up to max. 316 ° C / 4 hours. On request also in EPDM material up to max. 177 ° C available.

PROSICON® BLU SIGNATURE® PRODUCT CODE.

Premium. Reusable. Stabilized with Special Blends.

COLOR OPTIONS.

Special color runs available on request.

TECHNICAL CLEANLINESS FOR ACCURATE MASKING.

Prosicon® Silicone Maskign Caps and Plugs are stabilized and tempered separately. This process improves dimensional stability and prevents plasticizer exudation during customer applications under high temperature conditions.

PREMIUM SILICONE MATERIAL PROPERTIES.

Prosicon® Silicone Maskign Caps and Plugs have an excellent resistance to high temperature, chemicals and acids and can be used several times without loss of quality.

MATERIALS SELECTION GUIDE.

EPDM rubber, Neoprene, NBR rubber, SBR, TPE, ecc.

APPLICATION.

High Temperature Masking Caps and Plugs to protect your product during finishing processes like powder coating, KTL, Wet painting, anodizing, electroplating and e.coating treatments. Extremely temperature resistant up to 316° C, robust, versatile and time-saving in application.

SILICONE / EPDM CUSTOM DESIGN AT RECORD SPEED.

On request we develop and produce individually tailored solutions along with the standard items of this range: If you require additional dimensions, different materials and new colours. We would be pleased to assist you.

Customized. For your special application


Time Saver. Rapid Prototyping & Hi-Speed functional samples

Hi-Speed. Fast Lane Serial Mold Construction

Unbeatable. At the best price in the market

PROTEC PROSICON® EPS 250

High Temp Silicone Washer Pull Plugs – Long

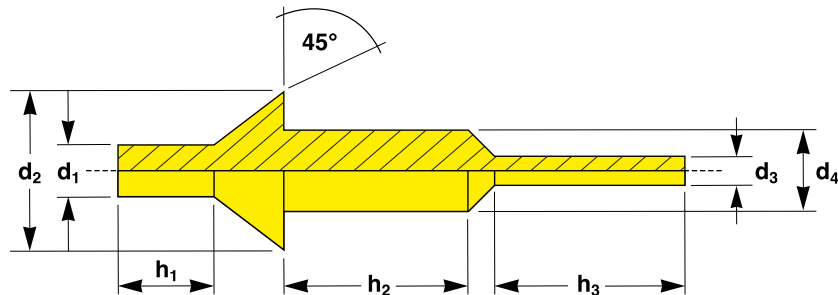

DIMENSIONS

All dimensions in mm

Dimensions							Shore A	Standard Pack	Reference No.
d ₁	d ₂	h ₁	d ₃	d ₄	h ₂	h ₃			
2.50	10.00	10.00	2.50	2.90	15.00	20.00	40-45	1.000	EPS 250 / 0114
3.00	10.00	12.70	2.00	3.60	9.90	9.90	40-45	1.000	EPS 250 / 0140
3.00	10.00	10.00	3.00	3.80	15.00	20.00	40-45	1.000	EPS 250 / 0150
3.00	12.00	10.00	3.00	4.50	15.00	20.00	40-45	1.000	EPS 250 / 0177
3.40	10.00	10.00	2.00	3.00	10.00	10.00	40-45	1.000	EPS 250 / 0118
3.40	10.00	10.00	2.20	4.00	10.00	9.00	40-45	1.000	EPS 250 / 0157
3.50	10.00	10.00	3.50	5.00	10.00	15.00	40-45	1.000	EPS 250 / 0197-S
3.70	10.00	10.00	3.70	5.00	10.00	10.00	40-45	1.000	EPS 250 / 0197-0394
3.80	10.00	10.00	2.20	3.50	10.00	15.00	40-45	1.000	EPS 250 / 0138
3.80	10.00	12.70	2.50	4.50	9.90	9.90	40-45	1.000	EPS 250 / 0175
4.80	12.70	10.20	3.00	4.70	9.90	11.00	40-45	1.000	EPS 250 / 0185
4.00	15.00	10.00	4.00	5.00	15.00	20.00	40-45	250	EPS 250 / 0197
4.00	14.00	10.00	4.00	5.50	15.00	20.00	40-45	250	EPS 250 / 0217
4.00	16.00	10.00	4.00	7.40	15.00	20.00	40-45	250	EPS 250 / 0291
4.10	14.30	12.70	2.80	5.00	9.90	9.90	40-45	1.000	EPS 250 / 0195
4.20	17.80	9.90	4.20	8.40	13.50	16.50	40-45	250	EPS 250 / 0330
4.50	15.00	10.00	4.50	6.00	15.00	20.00	40-45	250	EPS 250 / 0236-L
4.60	15.00	12.70	3.00	5.50	9.90	9.90	40-45	250	EPS 250 / 0217-1
4.80	15.90	12.70	3.30	5.70	9.90	9.90	40-45	250	EPS 250 / 0225
5.00	15.00	10.00	3.60	6.00	10.00	9.00	40-45	250	EPS 250 / 0236
5.00	15.00	10.00	3.60	6.00	10.00	9.00	40-45	250	EPS 250 / 0236
5.00	15.00	10.00	5.00	8.00	10.00	15.30	40-45	250	EPS 250 / 0315
5.00	15.00	10.00	5.00	8.00	15.00	22.00	40-45	250	EPS 250 / 0315-L
5.00	18.00	10.00	5.00	9.20	15.00	25.00	40-45	250	EPS 250 / 0362
5.00	20.00	10.00	5.00	11.00	15.00	25.00	40-45	100	EPS 250 / 0433
5.10	28.50	12.70	5.10	10.90	33.00	33.00	40-45	100	EPS 250 / 0430-L
6.10	17.50	12.70	4.10	7.20	9.90	19.10	40-45	250	EPS 250 / 0284
6.10	15.00	12.70	4.10	7.20	9.90	9.90	40-45	250	EPS 250 / 0285
6.10	16.50	10.50	4.10	7.20	12.70	15.20	40-45	250	EPS 250 / 0285-XL
7.40	20.60	12.70	5.00	8.80	9.90	9.90	40-45	250	EPS 250 / 0345
7.50	20.00	10.00	5.70	10.00	10.00	19.30	40-45	100	EPS 250 / 0394
8.10	20.00	12.70	5.50	9.50	9.90	9.90	40-45	250	EPS 250 / 0375
8.60	23.40	12.70	5.80	10.20	9.90	19.10	40-45	100	EPS 250 / 0400
9.10	20.00	12.70	6.20	10.90	9.90	9.90	40-45	100	EPS 250 / 0430
9.10	20.60	10.00	6.20	11.30	12.70	12.70	40-45	100	EPS 250 / 0445
9.90	27.00	7.60	6.70	11.70	9.90	9.90	40-45	100	EPS 250 / 0460

Should your requirements not be shown please ask for a separate quotation.
 PROTEC products and specifications are subject to improvement and change without notice.